



RESIDENTIAL MAILBOX DETAIL

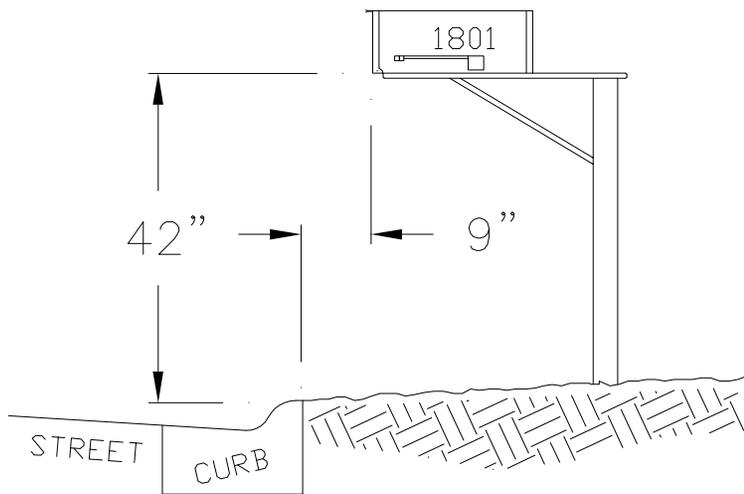

MAILBOX POST TO BE WOODEN 4"X4"
OR GALVANIZED POST (BRICK OR
MASONRY STRUCTURES NOT ALLOWED)

RESIDENTIAL DRIVEWAY AND SIDEWALK DETAIL

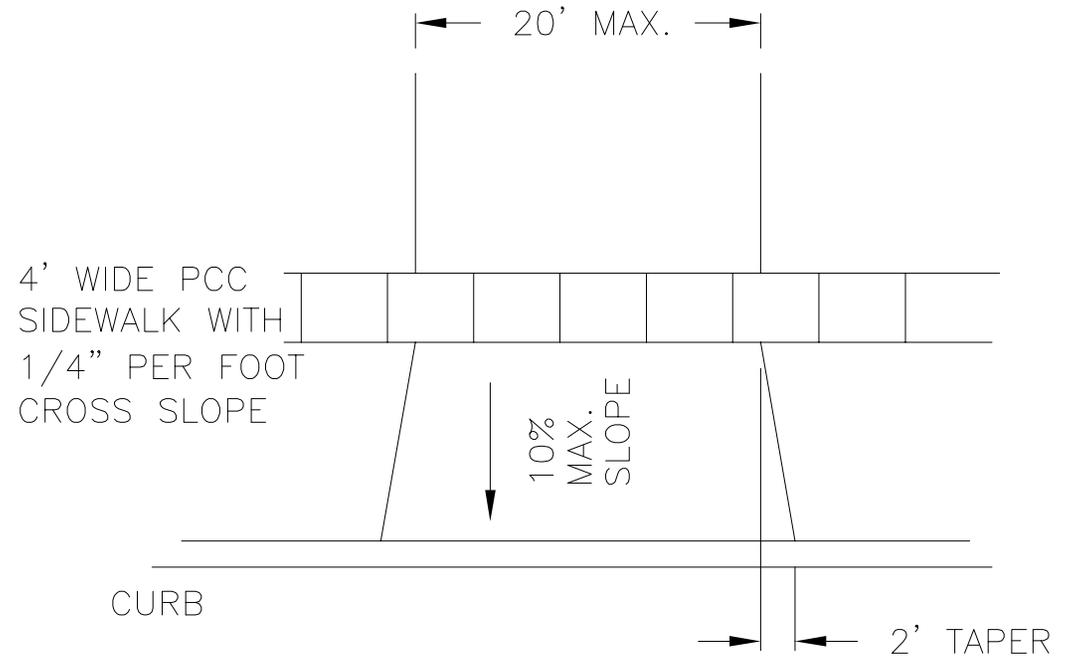

BITUMINOUS DRIVEWAYS TO BE 6" STONE
AND 2" ASPHALT OR 5" CLASS SI
NONREINFORCED CONCRETE OVER 2"
COMPACTED GRANULAR SUBBASE

SIDEWALK TO BE 5" CLASS SI CONCRETE
(6" AT DRIVEWAYS) OVER 2" COMPACTED
GRANULAR SUBBASE. CONSTRUCTION JOINTS
TO BE 4' ON CENTER, EXPANSION JOINTS 50'